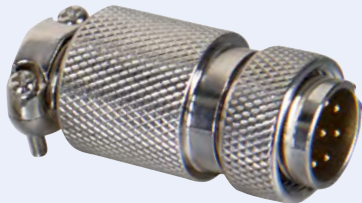
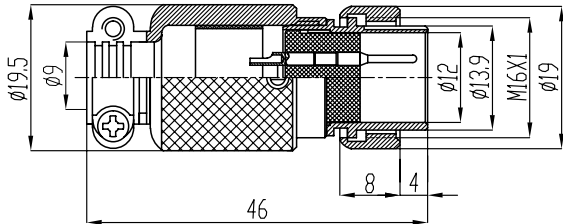

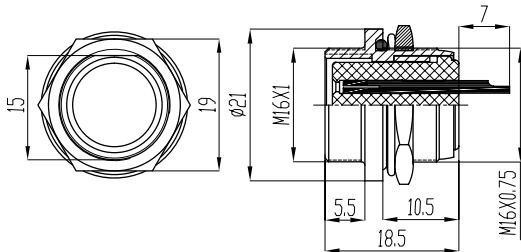


图 例 Description-Figure	安装尺寸图 Drawing	芯数 Contacts	订货号 Ordering-NO
18MF-16 电缆反装插头 18MF-16 male cable plug IP55 		8	18MF-16-8A
18MF-16 插座 18MF-16 female socket IP55 		8	18MF-16-8B

材料和技术方式

Material and specifications

接插方式 Coupling	螺纹连接 Threaded coupling	接线方式 Termination	焊接 Solder
外壳材料 Shell material	锌基合金（镀镍） Zinc alloy with nikelplate	接插次数 Mating cycle	500 次 500
绝缘体 Insert material	电木 bakelite	温度范围 Temperature range	-20℃ ~ +85℃
接触体材料 Contact material	铜（镀银 / 金） copper(silverplated/gold)	电缆直径 Cable diameter	≤ φ 9.0mm

技术参数

Technology parameter

孔位排列（从针的方向看）

The hole place arranges(Comply with the needle direction)

芯 数 NO.of contacts	8
额定电流 / 电压 Rated current/voltage	5A-125V
工作电压 (AC.V) 分钟 Operation limit voltage(AC.V.rms)	200
耐电压 (AC.V) 分钟 Withstanding voltage(AC.V.rms) I minute	1000
绝缘阻抗 (M) DC500V Insulation resistance(MΩ MIN.) at DC 500V	1000
接触阻抗 (M) DC1A Contact resistance (MΩ MAX.) AT DC 1A	5
焊杯口径 (mm) Solder cup mouth aperture	1.2
接触体孔径 (mm) Solder inter diameter	1

