
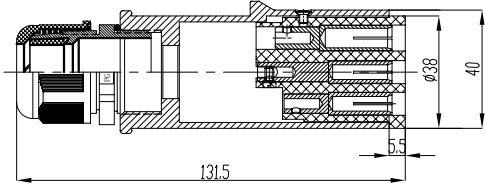

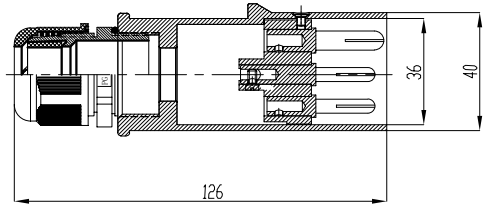

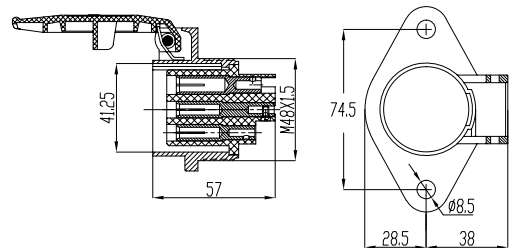

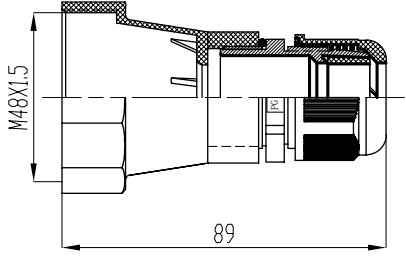




图 例 Description-Figure	安装尺寸图 Drawing	芯数 Contacts	订货号 Ordering-NO
拖挂车电缆母插头 Trailer straight female plug IP65 		3	GB24N-3A
		4	GB24N-4A
		5	GB24N-5A
		6	GB24N-6A
		7	GB24N-7A
拖挂车电缆公插头 Trailer straight male plug IP65 		3	GB24NF-3A
		4	GB24NF-4A
		5	GB24NF-5A
		6	GB24NF-6A
		7	GB24NF-7A
拖挂车二眼法兰公插座 Trailer in two eyes male socket 		3	GB24N-3B
		4	GB24N-4B
		5	GB24N-5B
		6	GB24N-6B
		7	GB24N-7B
拖挂车二眼法兰母插座 Trailer in two eyes female socket 		3	GB24NF-3B
		4	GB24NF-4B
		5	GB24NF-5B
		6	GB24NF-6B
		7	GB24NF-7B
尾管附件 Tail pipe accessories 		另购 separately	

孔位排列（从针的方向看）


The hole place arranges (Comply with the needle direction)




2+PE




3+PE



4+PE



5+PE



6+PE

材料和技术方式

Material and specifications

接插方式 Coupling	螺纹连接 Threaded coupling	接线方式 Termination	焊接 Solder
外壳材料 Shell material	铝合金（镀铬） Aluminum with nikelplate	接插次数 Mating cycle	500 次 500
绝缘体 Insert material	增强尼龙 PA66+GF30%	温度范围 Temperature range	-20℃ ~ +85℃
接触体材料 Contact material	铜（镀银 / 金） copper(silverplated/gold)	电缆直径 Cable diameter	≥ φ 15mm

技术参数

Technology parameter

芯 数 NO.of contacts	2+PE	3+PE	4+PE	5+PE	6+PE
额定电流 / 电压 Rated current/voltage	50A-360V 25A-360V	50A-360V 25A-360V	50A-360V 25A-360V	50A-360V 25A-360V	50A-360V 25A-360V
工作电压（AC.V）分钟 Operation limit voltage(AC.V.rms)	500	500	500	500	500
耐电压（AC.V）分钟 Withstanding voltage(AC.V.rms) l minute	2000	2000	2000	2000	2000
绝缘阻抗（MΩ）DC500V Insulation resistance(MΩ MIN.) at DC 500V	5000	5000	5000	5000	5000
接触阻抗（MΩ）DC1A Contact resistance (MΩ MAX.) AT DC 1A	1	1	1	1	1
焊杯口径（mm） Solder cup mouth aperture	4/3.5	4/3.5	4/3.5	4/3.5	4/3.5
接触体孔径（mm） Solder inter diameter	φ 6.4×1 φ 4.8×2	φ 6.4×1 φ 4.8×3	φ 6.4×1 φ 4.8×4	φ 6.4×1 φ 4.8×5	φ 6.4×1 φ 4.8×6