
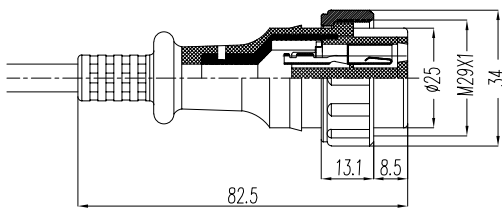

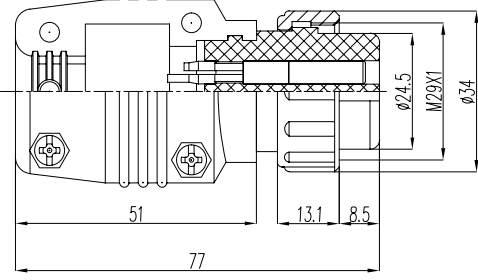

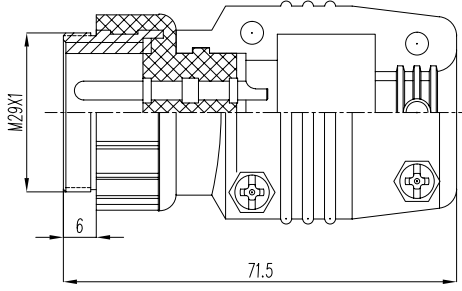

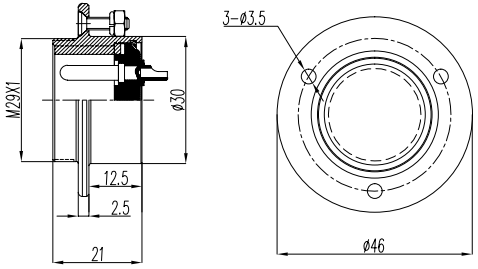
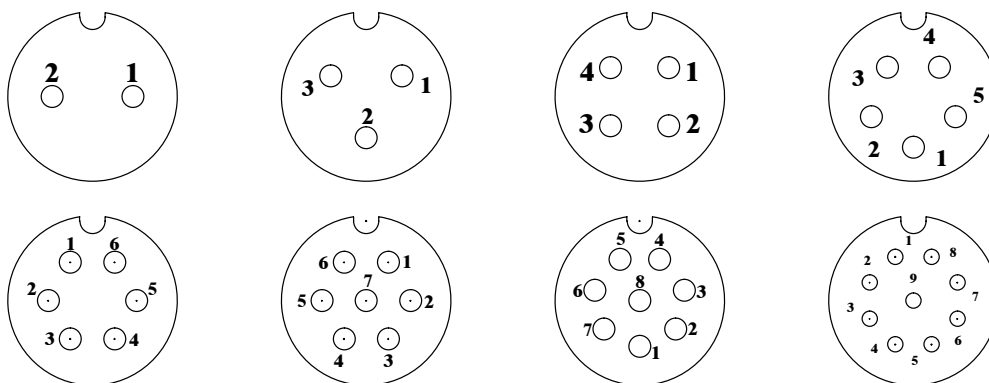


图 例 Description-Figure	安装尺寸图 Drawing	芯数 Contacts	订货号 Ordering-NO
SX30 塑封母插头 SX30 Plastic female plug IP67 		<p>SX 30 - (2) A-ZS - (2) M - (?)</p> <p>型号 品名大小 接触体个数 特征 (注射母插头)</p> <p>包塑插头 按规范填写电线长度 电线规格大小</p>	
直式电缆母插头 Straight female plug IP55 			2 SX30-2A
			3 SX30-3A
			4 SX30-4A
			5 SX30-5A
			6 SX30-6A
			7 SX30-7A
			8 SX30-8A
			9 SX30-9A
电缆对接公插头 Male cable connecting plug IP55 		2 SX30-2K	
		3 SX30-3K	
		4 SX30-4K	
		5 SX30-5K	
		6 SX30-6K	
		7 SX30-7K	
		8 SX30-8K	
		9 SX30-9K	
三眼法兰公插座 Three eyes flange male socket IP55 		2 SX30-2B	
		3 SX30-3B	
		4 SX30-4B	
		5 SX30-5B	
		6 SX30-6B	
		7 SX30-7B	
		8 SX30-8B	
		9 SX30-9B	

孔位排列 (从针的方向看)

The hole place arranges(Comply with the needle direction)



材料和技术方式

Material and specifications

接插方式 Coupling	螺纹连接 Threaded coupling	接线方式 Termination	焊接 Solder
外壳材料 Shell material	锌基合金 (镀锌镀黑) Zinc alloy Zincplated black	接插次数 Mating cycle	500 次 500
绝缘体 Insert material	增强尼龙 PA66+GF30%	温度范围 Temperature range	-20℃ ~ +85℃
接触体材料 Contact material	铜 (镀银 / 金) copper(silverplated/gold)	电缆直径 Cable diameter	φ 7.0mm ~ ≤ φ 8.5mm

技术参数

Technology parameter

芯 数 NO.of contacts	2	3	4	5	6	7	8	9
额定电流 / 电压 Rated current/voltage	40A-300V	40A-300V	40A-300V	40A-250V	40A-250V	40A-250V	40A-150V	16A-150V
工作电压 (AC.V) 分钟 Operation limit voltage(AC.V.rms)	500	500	500	400	400	400	250	200
耐电压 (AC.V) 分钟 Withstanding voltage(AC.V.rms) 1 minute	2000	2000	2000	1500	1500	1500	1500	1500
绝缘阻抗 (MΩ) DC500V Insulation resistance(MΩ MIN.) at DC 500V	2000	2000	2000	2000	2000	2000	2000	2000
接触阻抗 (MΩ) DC1A Contact resistance (MΩ MAX.) AT DC 1A	1	1	1	1	1	1	1	3
焊杯口径 (mm) Solder cup mouth aperture	2.4	2.4	2.4	2.4	2.4	2.4	2.4	1.6
接触体孔径 (mm) Solder inter diameter	3.45	3.45	3.45	3.45	3.45	3.45	3.45	2.45