

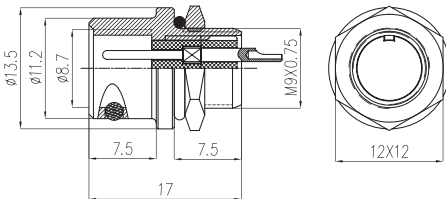
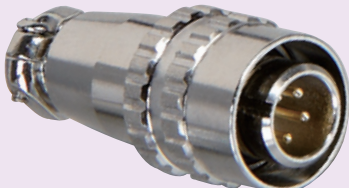
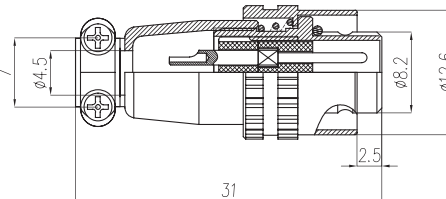

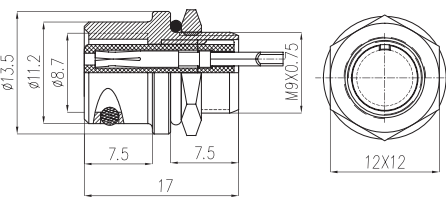
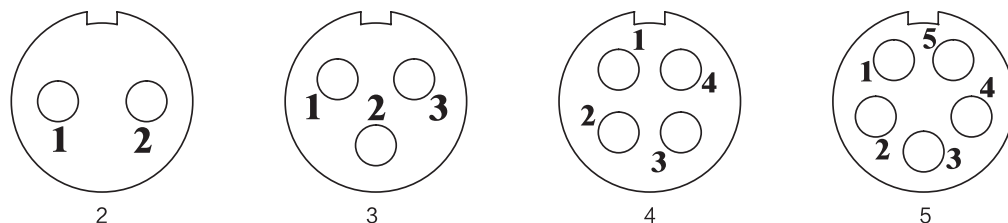


图 例 Description-Figure	安装尺寸图 Drawing	芯数 Contacts	订货号 Ordering-NO
直式电缆母插头 Straight female plug IP65 		2	XS9-2A
		3	XS9-3A
		4	XS9-4A
		5	XS9-5A
板前安装公插座 Paned front mount male socket IP65 		2	XS9-2B
		3	XS9-3B
		4	XS9-4B
		5	XS9-5B
直式电缆公插头 Straight male plug IP65 		2	XS9F-2A
		3	XS9F-3A
		4	XS9F-4A
		5	XS9F-5A
板前安装母插座 Panel front mount male socket IP65 		2	XS9F-2B
		3	XS9F-3B
		4	XS9F-4B
		5	XS9F-5B

The hole place arranges (Comply with the needle direction)



Material and specifications

接插方式 Coupling	推入式快速锁紧 Push-Pull	接线方式 Termination	焊接 Solder
外壳材料 Shell material	锌基合金（镀镍） Zinc alloys with nikelplate	接插次数 Mating cycle	500 次 500
绝缘体 Insert material	电木 Bakelite	温度范围 Temperature range	-20℃ ~ +85℃
接触体材料 Contact material	铜（镀银 / 金） copper(silverplated/gold)	电缆直径 Cable diameter	≤ ϕ 4.5mm

Technology parameter

芯 数 NO.of contacts	2	3	4	5
额定电流 / 电压 Rated current/voltage	5A/260V	5A/260V	5A/125V	5A/125V
工作电压 (AC.V) 分钟 Operation limit voltage(AC.V.rms)	250	250	200	200
耐电压 (AC.V) 分钟 Withstanding voltage(AC.V.rms) 1 minute	2000	2000	2000	2000
绝缘阻抗 (MΩ) DC500V Insulation resistance(MΩ MIN.) at DC 500V	1500	1500	1500	1500
接触阻抗 (mΩ) DC1A Contact resistance (mΩ MAX.) AT DC 1A	12	12	12	12
焊杯口径 φ (mm) Solder cup mouth aperture	0.9	0.9	0.9	0.9
接触体孔径 φ (mm) Solder inter diameter	1	1	1	1